



Ordering Code: **RV-17A-X-Y-8**

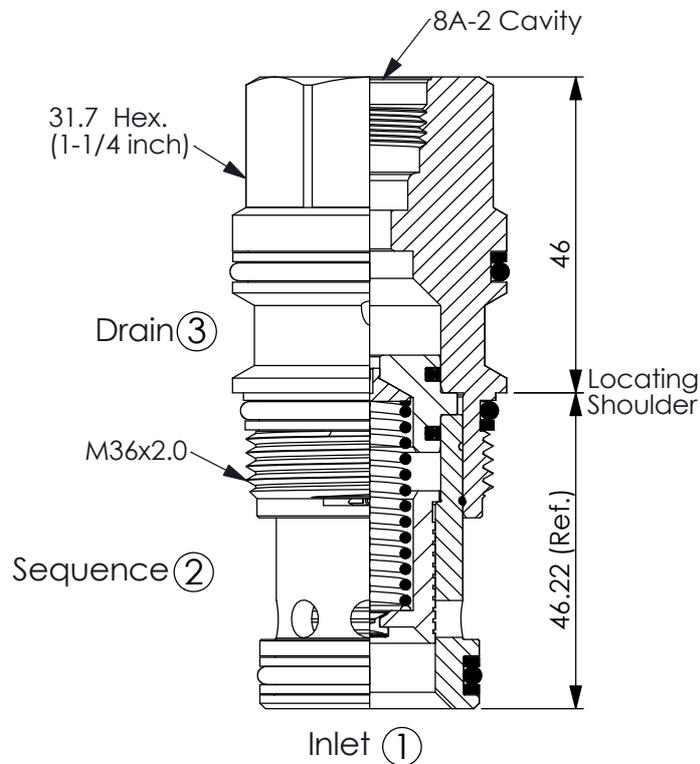

UNIT:mm

Illustrations / detail are for reference only. Data subject to change.

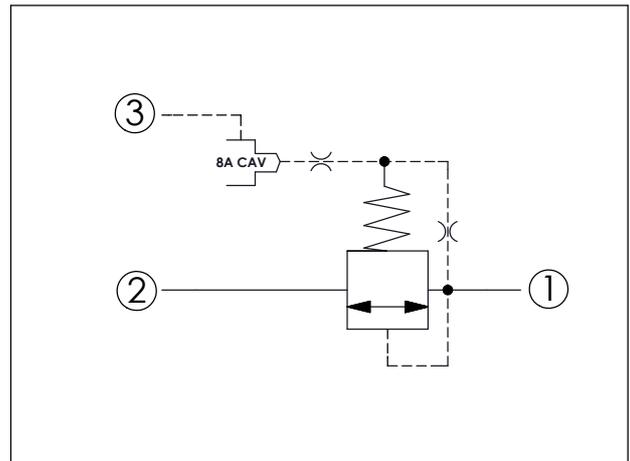

TECHNICAL DATA

Max. Operating pressure: 350 bar


Rated flow: 240 l/min

Cavity-Tooling: 17A-3

Installation torque: 200 - 215 Nm

Weight: 0.49 kg

Will accept maximum pressure at port (2); suitable for use in cross port relief circuits. If used in cross port relief circuits, consider spool leakage.

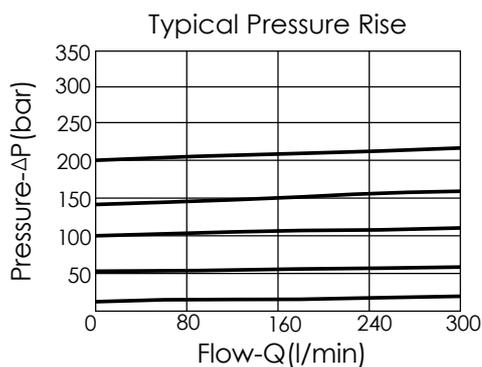

X OPERATION

30 Standard Type

- Response Time-Typical (10 ms)
- Maximum Leakage Approximately (66 cc/min./70 bar)

Y SPRINGS

MINIMUM CONTROL PRESSURE

D 1.7 bar (25 psi)

W 7 bar (100 psi)

W spring is suit for higher pressure drop application. Please consult our sales department.