



Ordering Code: **EC-04W-X-Y-Z**

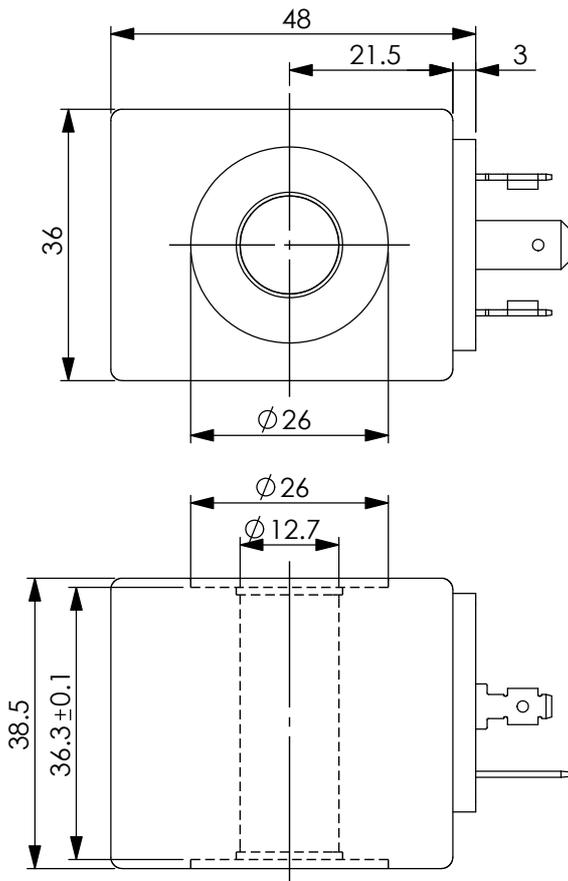

UNIT:mm
Illustrations / detail are for reference only. Data subject to change.

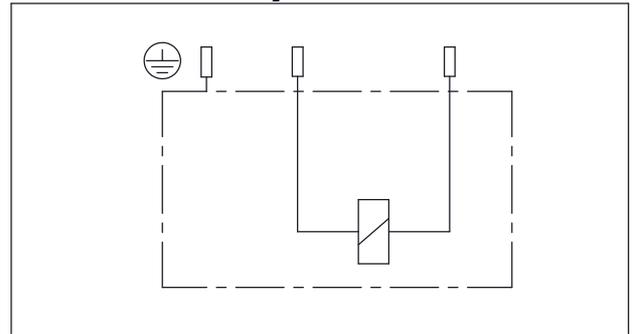

TECHNICAL DATA

Weight: 0.22 kg

HEAT INSULATION CLASS H:
356°F | (180°C)

Ambient temperature range:
-22+140°F | (-30+60°C)

Available on request:
Different Voltages -
Different connectors.

Inlet voltage fluctuations must not exceed ± 10% of nominal voltage to obtain correct operation and long life of coils.

Winner Coil Using Notice:
Please refer Winner technical information. (T.101.105.E Winner Coil Using Notice)

CE approved, **UKCA** approved

X	Power (W)
200	20 Watt.

Y	Connections
H	Connessione A EN 175301-803 ISO 4400 (DIN 43650)

Z	Voltage (V)		Resistance (Ω) 20~25 °C	Current (A)	
	Nominal			Cold Coil	Hot Coil
C	24V RAC	When ordering RAC coils, please make sure also to order ED-30-R-01-A so as to ensure that the solenoid valves can operate properly.	23.2±7%	0.95	0.63
B	110V RAC		470±7%	0.19	0.14
A	220V RAC		1910±7%	0.09	0.07
F	10V DC		5.0±8%	1.98	1.28
E	12V DC		7.5±7%	1.66	1.06
M	14V DC		9.3±7%	1.48	0.96
N	20V DC		20±7%	0.99	0.65
D	24V DC		28.6±7%	0.88	0.53
G	26V DC		34.2±7%	0.77	0.52
J	28V DC		39.2±7%	0.71	0.50
L	36V DC		64±7%	0.56	0.36
H	48V DC		110±7%	0.45	0.28